

Images Analysis by Using Fuzzy Clustering

Shahla Hazim Ahmed Kharofa

Department of Dental Basic Sciences, College of Dentistry, University of
Mosul, IRAQ

Shahlahazim@gmail.com

Received : 10/10/2018

Revised : 18/10/2018

Accepted : 8/11/2018

Available online : 25 /1/2019

DOI: 10.29304/jqcm.2019.11.1.465

Abstract:

The Fuzzy C-Mean algorithm is one of the most famous fuzzy clustering techniques. The process of fuzzy clustering is a useful method in analyzing many patterns and images. The Fuzzy C-Mean algorithm is widely used and based on the objective function reduction through adding membership values and the fuzzy coefficient. The Mean Absolute Error (MAE) was also measured in this research for each execution.

The research found that when the number of clusters increases, the mean absolute error value is reduced. When the number of clusters increased. The more details in the resulting image were not present in the original image. This helps in the analysis of the images.

In this research, medical images were treated and analyzed. The analysis helps physicians explain the patient's health status and also according to suggested algorithm helps them to diagnose the possibility of a particular disease or tumor. A Matlab program was created to perform the analysis.

Keywords:

Fuzzy clustering, Fuzzy C-Mean Algorithm, Matlab Language, Image analysis, Mean Absolute Error.

Introduction:

Image analysis involves processing image data to determine the information needed to solve problems. The process of image analysis is the process of converting objects in the image data to quantitative information which derive and describe the object from its image and is usually flexible. The end result is high level information [1].

Medical images play a key role in helping to detect and diagnose many diseases. Medical imaging now provides advanced imaging techniques that enable the physician to see human bodies directly and monitor micro anatomical changes [2].

Methods:

In this research, Fuzzy C-Mean Algorithm (FCM) was used to analyze three medical images.

Fuzzy Clustering:

Fuzzy clustering is an extension of the analysis of the traditional techniques group, [3] and is usually used when there is no apparent grouping in the data set. The essence of the algorithm is the use of iterative processes because the number of steps to obtain the output is not predefined [4]. The objective of the fuzzy clustering method is to define each cluster by looking for its own membership function [5][6].

The performance of the clustering algorithm is affected by the initial values chosen at execution, so the algorithm is repeated a number of times to obtain the appropriate results[7]. The results obtained by the researchers showed that the results were of much higher quality than the use of traditional methods [8].

Fuzzy C-Mean Algorithm (FCM):

FCM is also called Fuzzy ISODATA. This method was developed by Dunn (1973) and improved by Bezdek (1981) [9]. FCM algorithm is one of the most effective algorithms of fuzzy clustering. It is based on the principle of fuzzy logic. It allows each data point to belong to the cluster at a membership degree, so that each data point can belong to several clusters at the same time and with different membership degrees between 0 and 1[10] [11].

The aim of FCM is to find cluster centers in the feature space that minimize an objective function. The objective function is associated with the optimization problem, which minimizes within class variation and maximizes variation between two classes [12].

This algorithm is widely used in image processing applications such as medical imaging and remote sensing. It is a local search optimization algorithm [13].

The FCM algorithm assign a membership for each data point. By calculating the distance between the cluster center and the data point. More the data is near to the cluster center more is its membership towards the particular cluster center. After each iteration membership and cluster centers are updated [14].

The steps of Fuzzy C-Means

Algorithmic is:

1. Input original image
- Let $X = \{x_1, x_2, x_3 \dots, x_n\}$ be the set of pixels image and $V = \{v_1, v_2, v_3 \dots, v_c\}$ be the set of centers.
2. Randomly select 'c' cluster centers.
3. Calculate the fuzzy membership ' μ_{ij} ' using equation (1):

$$\mu_{ij} = 1 / \sum_{k=1}^c (d_{ij} / d_{ik})^{(2/m-1)} \quad \text{--- (1)}$$

4. Compute the fuzzy centers ' v_j ' using equation (2):

$$v_j = (\sum_{i=1}^n (\mu_{ij})^m x_i) / (\sum_{i=1}^n (\mu_{ij})^m) \quad \text{---(2)}$$

Where:

- 'n' is the number of data points.
- ' v_j ' represents the j^{th} cluster center
- 'm' is the fuzziness index $m \in [1, \infty]$.
- 'c' represents the number of cluster center.

5. Repeat step 3) and 4) until the minimum 'J' value is achieved or $\|U^{(k+1)} - U^{(k)}\| < \beta$.

Where:

- 'k' is the iteration step.
- ' β ' is the termination criterion between [0, 1].
- ' $U = (\mu_{ij})_{n \times c}$ ' is the fuzzy membership matrix.
- 'J' is the objective function.

6. end [15][16][17].

Evaluation Performance Factors:

- **Mean Absolute Error (MAE):** It is used in statistic to measure the difference between two continuous variables. MAE is defined in equation (3) as followed:

$$\text{---(r)} \quad \text{MAE} = \frac{1}{n} \sum_{j=1}^n |y_j - \hat{y}_j|$$

Where: y_j =Original image, \hat{y}_j =Output image. Minimum value of MAE indicate that best result, because it include the minimum difference between the original image and output image [18].

Suggested Algorithmic:

The following algorithm was proposed to execute Fuzzy C-Mean Algorithm and compute the Mean Absolute Error (MAE) values for medical images.

This algorithm is:

1. Input medical image
2. Input number of clusters (in this research, number of clusters are equal 3 or 5 or 9)
3. Display original image
4. Randomly select 'c' cluster centers.
5. Calculate the fuzzy membership ' μ_{ij} '
6. Compute the fuzzy centers ' v_i '
7. Repeat step 5) and 6) until the minimum 'J' value is achieved or $\|U^{(k+1)} - U^{(k)}\| < \beta$.
8. Display output image
9. Compute Mean Absolute Error value (MAE) between original image and result image.
10. end

Results and Discussion:

After applying the suggested algorithm to the three medical images, The details of result image were better than the original image. These details are increased by increasing the number of clusters entered. These details help the doctors to diagnose and analyze the disease. The results of executing the suggested algorithm were shown in (Figure 1-3) and (Table 1). The graph of MAE values for Image 1, Image 2 and Image 3 were show in (Figure 4-6). In each execution. The mean absolute error value was measured. It was observed that; the greater number of clusters, the lower of the mean absolute error value.




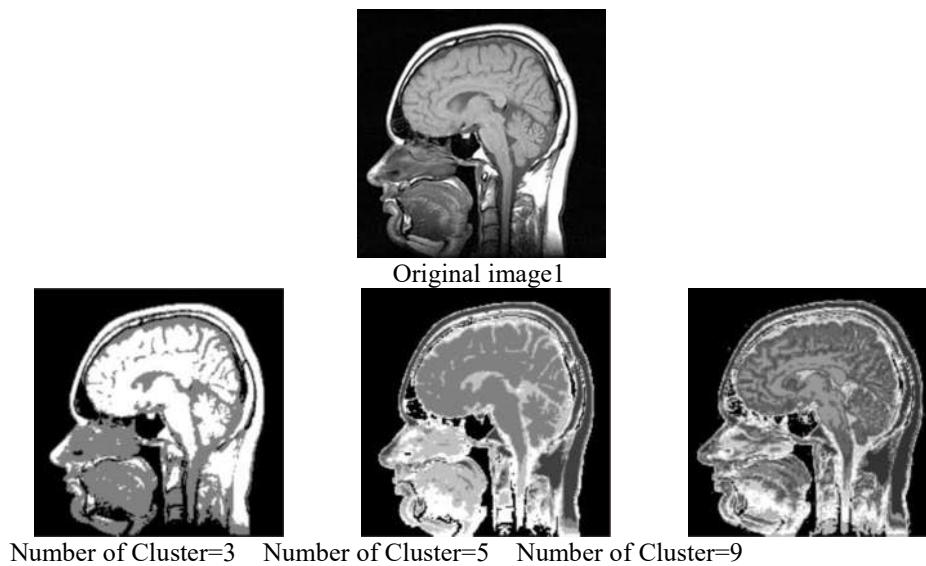


Figure 1: Many cases of image1 after execution FCM algorithm



Original image2



Number of Cluster=3 Number of Cluster=5 Number of Cluster=9

Figure 2: Many cases of image2 after execution FCM algorithm



Original image3



Number of Cluster=3 Number of Cluster=5 Number of Cluster=9

Figure 3: Many cases of image3 after execution FCM algorithm

Table 1: Represent the results of execution the suggested algorithm and compare of MAE values in Image1, Image2 and Image3

Image Name	Size of Image	Number of Cluster	Center	Number of Iteration	Objective function values	Mean Absolute Error (MAE) Values
Image1	100, 100	3	1.0.2387 187.0227 8.9424	44	1318.088.894	1.7
		5	79.7341 247.7710 177.0.79 110.7.77 7.3.39	83	2873017.247	1.3
		9	249.0573 77.7441 93.2787 37.8997 181.8289 141.717. 173.907. 117.2323 0.1437	100	842195.516	93
Image2	100, 150	3	17.0.8971 41.9783 202.324.	32	114789.3.771	137
		5	187.127. 1.0.8.397 149.1992 28.7307 203.7.71	100	2772707.947	97
		9	117.7043 24.0.148 2.4.9843 73.3.78 141.8892 242.4897 108.7911 184.0714 204.04.3	100	1.21010.370	87
Image3	150, 120	3	112.844. 177.8174 244.04.0	40	11317470.414	121
		5	90.1411 131.3992 172.897. 192.7021 247.0.111	100	3047870.07.	1.7
		9	14.0.731 192.110. 211.77. 117.0321 97.713. 108.7914 177.37.8 247.7349 03.2349	100	1.48110.728	98

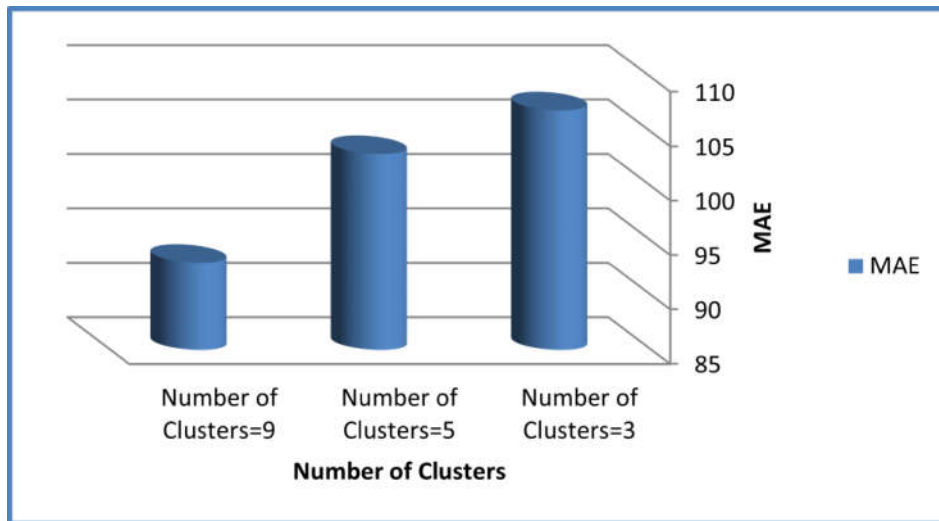


Figure 4: Mean Absolute Error (MAE) of Image 1

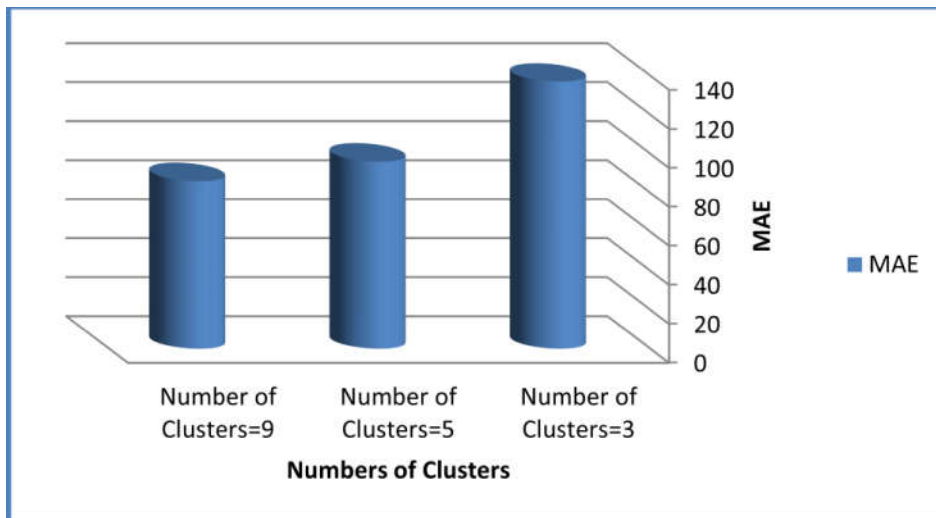


Figure 5: Mean Absolute Error (MAE) of Image 2

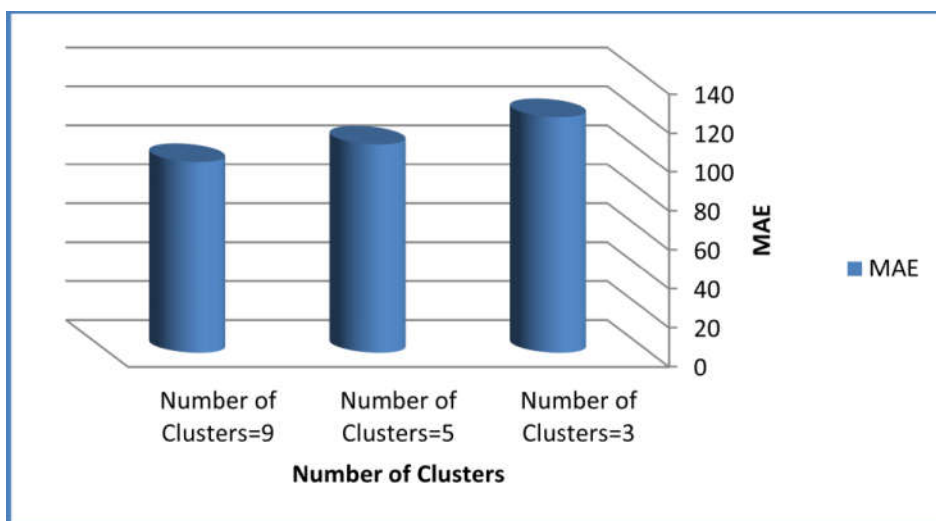


Figure 6: Mean Absolute Error (MAE) of Image 3

Conclusion:

Medical image analysis is currently an important subject in modern medicine. In view of the increasing number of patients as it helps the doctor or the person concerned to give a preliminary idea of the patient's condition without any operation or surgical intervention.

FCM algorithm is the most popular fuzzy clustering algorithm and extensively used in medical image. In this research, used FCM algorithm to analysis medical images. This algorithm provide few iterations steps already provide good approximation to the final solution. After execution of the proposed algorithm, it was concluded that by increasing the number of clusters in the Fuzzy C-Mean algorithm, the Mean Absolute Error (MAE) values was reduced. The suggested algorithm gave good results in image analysis to help doctors to diagnose and identify the disease.

Reference:

- [1]Perumal, K. and V. G. Karthikram, **A Fusion of SOM and Fuzzy C-Means for Image Processing**, International Journal of Computer Technology & Applications, Vol. 4 (2013), 647-652.
- [2]Shihab, Ahmed Ismail, **Fuzzy Clustering Algorithms and Their Application to Medical Image Analysis**, (2000), 1-169.
- [3]Kaur, Amritpal and Amandeep Kaur, **Evaluation of Parameters of Image Segmentation Algorithms-JSEG and ANN**, International Journal of Advanced Research in Electronics and Communication Engineering, Vol. 3, Issue 8 (2014), 854-865.
- [4]Panapakidis, Ioannis and Georgios C., **Optimal Selection of Clustering Algorithm via Multi - Criteria Decision Analysis (MCDA) for Load Profiling Applications**, Journal Applied Sciences, Vol. 8 (2018), 1-42.
- [5]Ye, An-Xin and Yong-Xian, **A Fuzzy C-Means Clustering Algorithm Based on Improved Quantum Genetic Algorithm**, International Journal of Database Theory and Application, Vol. 9, No. 1 (2016), 227-236.
- [6]Kathiresan, V. and P. Sumathi, **A New Fuzzy C Mean Clustering Algorithm Based on Constrained Dynamic Time Warping Distance Measure**, Journal of Theoretical and Applied Information Technology, Vol. 67, No. 1 (2014), 212-219.
- [7]Sohi, Neelofar , **Performance Improvement of Fuzzy C-mean Algorithm for Tumor Extraction in MR Brain Images**, International Journal of Computer Applications, Vol. 59, No.5 (2012), 40-45.
- [8]Al-shamasneh, Alaa and Unaizah Hanum, **Artificial Intelligence Techniques for Cancer Detection and Classification: Review Study**, European Scientific Journal, Vol. 13, No. 3 (2017), 342-370.
- [9] Thi, Phan and Ngo Quang, **A Proposal to Improve Sep routing Protocol Using Insensitive Fuzzy C-Means in Wireless Sensor Network**, International Journal of Computer Networks & Communications (IJCNC), Vol. 9, No. 6 (2017), 47-56.
- [10]Sangari, A. and D. Saraswady, **Performance Evaluation of Optimal Parameters for Pest Image Segmentation using FCM and ACO**, Indian Journal of Science and Technology, Vol. 9, No. 39 (2016), 1-6.
- [11]Abed-Maksoud, Eman and Mohammed Elmogy, **Brain Tumor Segmentation Based on a Hybrid Clustering Technique**, Egyptian Informatics Journal, (2015), 1-11.
- [12]Gupta, Supriya and Mujeeb Rahman, **Performance Analysis if Image Segmentation Using Parallel Processing**, International Journal of Innovative Research in Computer Science & Technology (IJIRCST), Vol. 3, Issue 1 (2015), 57-63.
- [13]Shah, Brijesh, **Novel Improved Fuzzy C-Mean Algorithm for MR-Image Segmentation**, International Journal of Soft Computing and Engineering (IJSCE) , Vol. 2 (2012), 355-357.
- [14]Kumari, Neelam and Bhawna Sharma, **Implementation of Possibilistic Fuzzy C-Means Clustering Algorithm in Matlab**, International Journal of Scientific & Engineering Research, Vol. 3 (2012), 1-9.
- [15]Fagbola, T. Mathew and Babatunde R. , **Image Clustering using a Hybrid GA-FCM Algorithm**, International Journal of Engineering and Technology Volume 3, No. 2 (2013), 99-107.
- [16]Year, Raciél and Luis Martínez, **Fuzzy Tools in Recommender System: A Survey**, International Journal of Computational Intelligence Systems, Vol. 10 (2017), 776-803.
- [17]Hua, Jian, **A Fuzzy C-Mean Clustering Algorithm for Image Segmentation Using Nonlinear Weighted Local Information**, Journal of Information Hiding and Multimedia Signal Processing, Vol. 8, No. 3, (2017), 578-588.
- [18]Al-Obaidi, Fatin E. and Ali Jassim, **Which Bits Is Better in Least Significant Bit**, Journal of Information Security, Vol. 6 (2015),161-165.

تحليل الصور باستخدام العنقدة المضببة

شهلة حازم احمد خروفة

قسم علوم طب الأسنان الأساسية ، كلية طب الأسنان ، جامعة الموصل

المستخلص:

تم في هذا البحث استخدام خوارزمية (Fuzzy C-Mean) والتي تعد من أشهر تقنيات العنقدة المضببة. تعد عملية العنقدة بالمنطق المضبب طريقة مفيدة وجيدة في تحليل العديد من الأنماط والصور، وخوارزمية (Fuzzy C-Mean) تستخدم بشكل واسع وتكون مبنية على أساس تقليل الدالة القياسية وذلك بإضافة قيم العضوية ومعامل التضبيب. كما تم قياس معدل الخطأ المطلق لكل حالة تنفيذ.

توصل البحث إلى أن عند زيادة عدد العناقيد المدخلة تقلل قيمة الخطأ المطلق المحسوبة، كما أنه بزيادة عدد العناقيد تظهر تفاصيل أكثر في الصورة الناتجة لم تكن موجودة في الصورة الأصلية وهذا يساعد في تحليل الصور. تم التعامل مع الصور الطبية في البحث وتحليلها وفق الخوارزمية المقترحة. تساعد عملية التحليل الأطباء في تفسير الحالة الصحية للمريض وتساعد أيضاً على التشخيص كاحتمالية الإصابة بمرض معين أو ورم. كما تم عمل برنامج بلغة ماثلاب (Matlab) لتنفيذ عملية التحليل.